


JET SERIES

JET 30

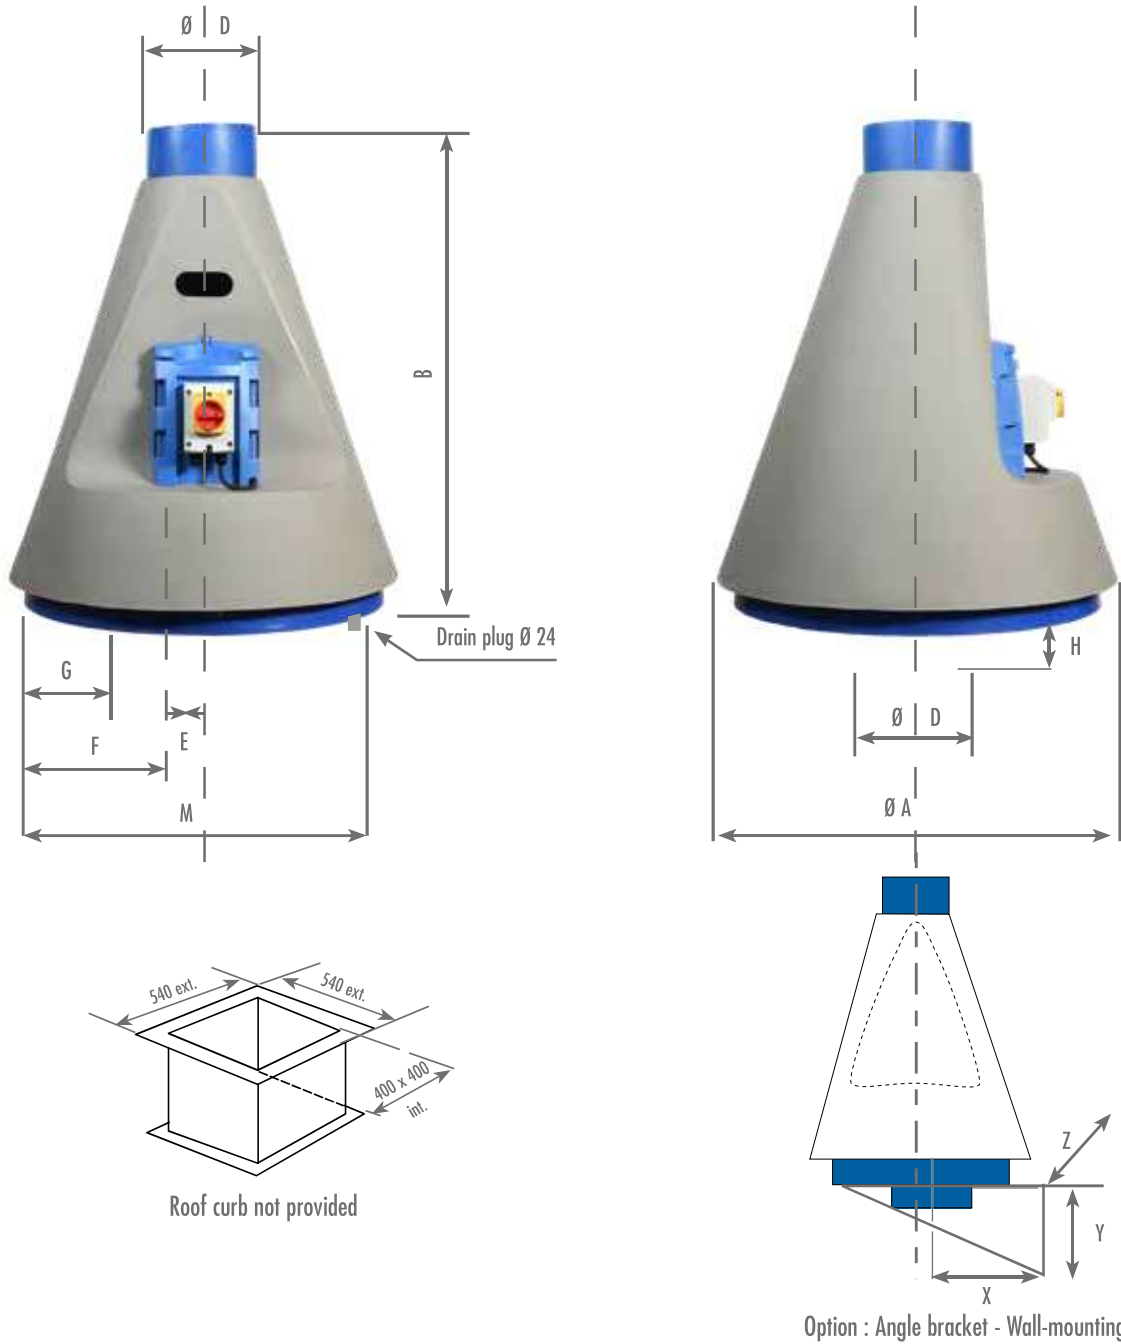

Available in  

Dimension (mm) - Metal stand not included (see accessories)


A	B	ØD	E	F	G	H	G'	X	Y	Z	M
880	1040	250	70	200	75	70	130	400	400	600	540-540 mm

NOISE LEVELS

Speed (T/min)	Acoustic (dB)				Frequency Octave (Hz)							
	Qv (m ³ /h)	Sp (Pa)	LwA dB(A)	LpA* dB(A)	63	125	250	500	1000	2000	4000	8000
930	1006	185	69	48	67	69	64	65	65	61	57	53
1450	1570	450	78	58	77	78	74	74	74	71	66	63

*Acoustic pressure Lp at 3 meters - Outlet acoustic data available on request.

JET SERIES - JET 30

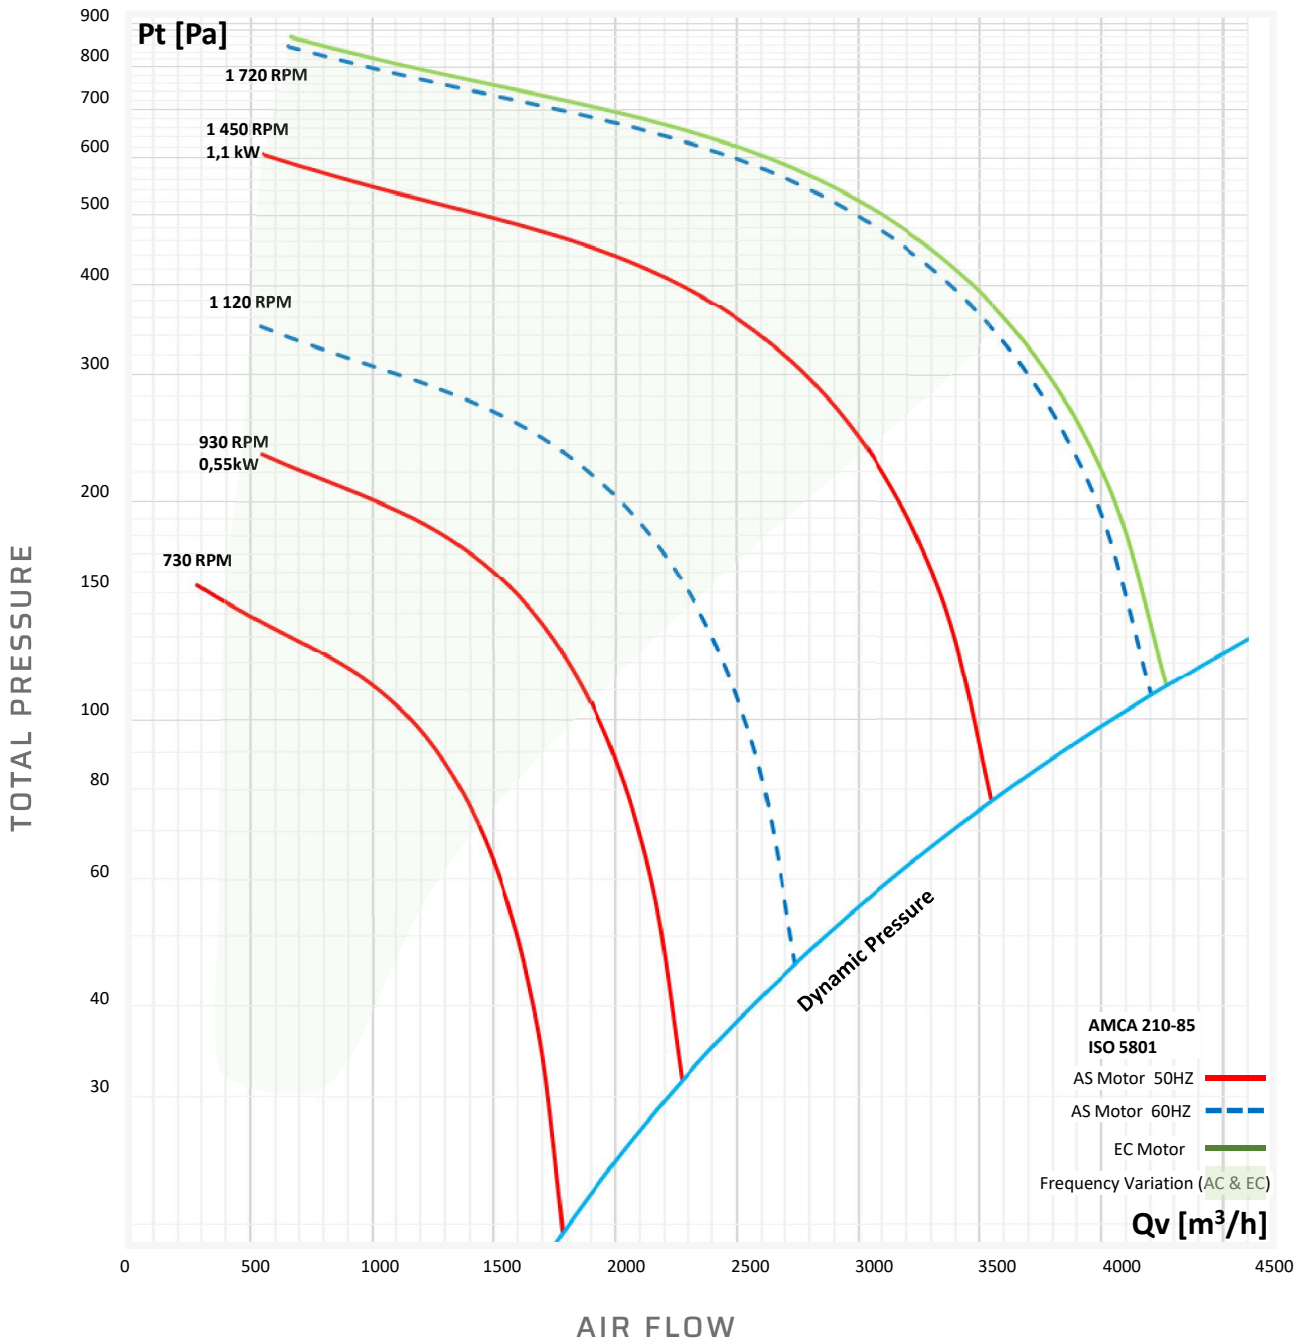

ELECTRICAL FEATURES

Motor	Power (kW)	Motor RPM	Voltage (V)	Intensity (A)	Weight (kg)	Reference Number
IP55 Asynchronous Single-Phase	1,1	1450	230	7,23	23,3	71302010
IP65 EC Single-Phase	1	1720	220/277	8,8	23,1	72302010
IP55 Asynchronous Three-Phase	0,55	930	230/400	2,72/1,57	21,3	71301000
	1,1	1450	230/400	4,32/2,48	23,8	71302000
IP66 Asynchronous Three-Phase ATEX	1,1	1450	230/400	5,7/3,3	23,3	71302003

Mandatory PTC Sensor for ATEX motor with Frequency Inverter.