


# JET SERIES

## JET 25

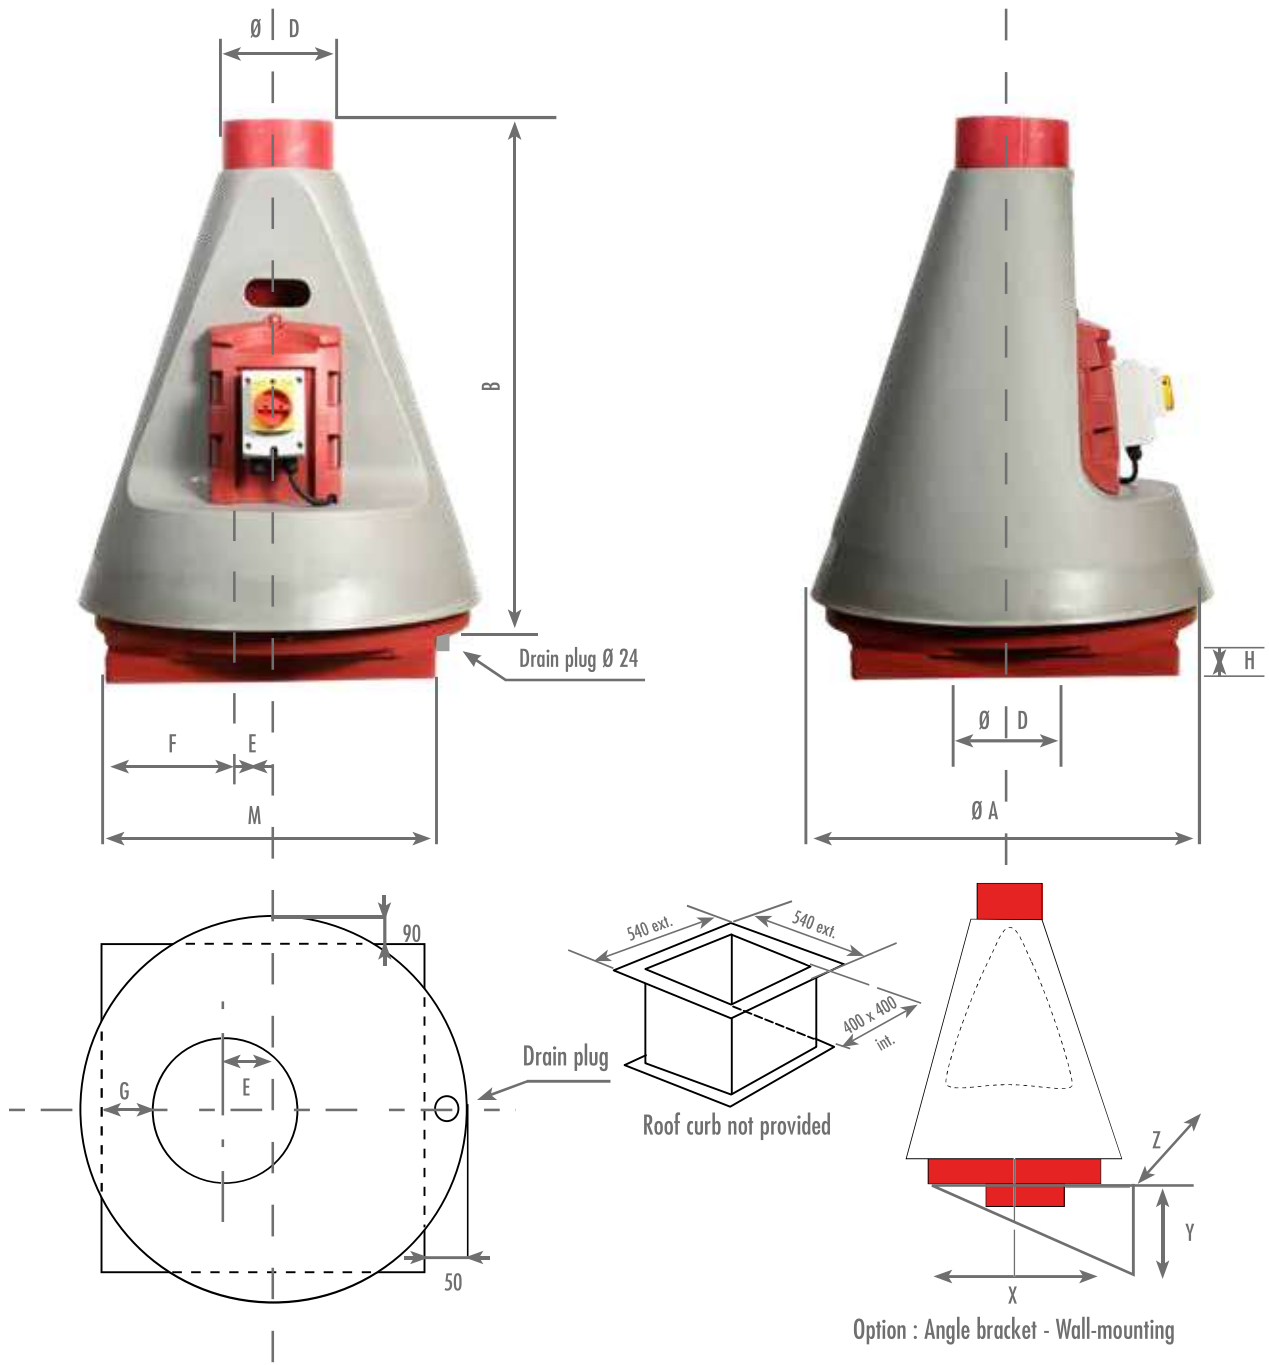

Available in  

Dimension (mm) - Metal stand not included (see accessories)


A	B	ØD	E	F	G	H	I	X	Y	Z	M
735	900	200	60	240	145	25	55	330	350	510	540-540 mm

## NOISE LEVELS

Speed (T/min)	Acoustic (dB)				Frequency Octave (Hz)							
	Qv (m³/h)	Sp (Pa)	LwA dB(A)	LpA* dB(A)	63	125	250	500	1000	2000	4000	8000
1450	647	325	72	51	71	75	71	69	67	63	59	55
2870	1280	1273	87	66	86	90	86	84	82	77	73	70

\*Acoustic pressure Lp at 3 meters - Outlet acoustic data available on request.

# JET SERIES - JET 25

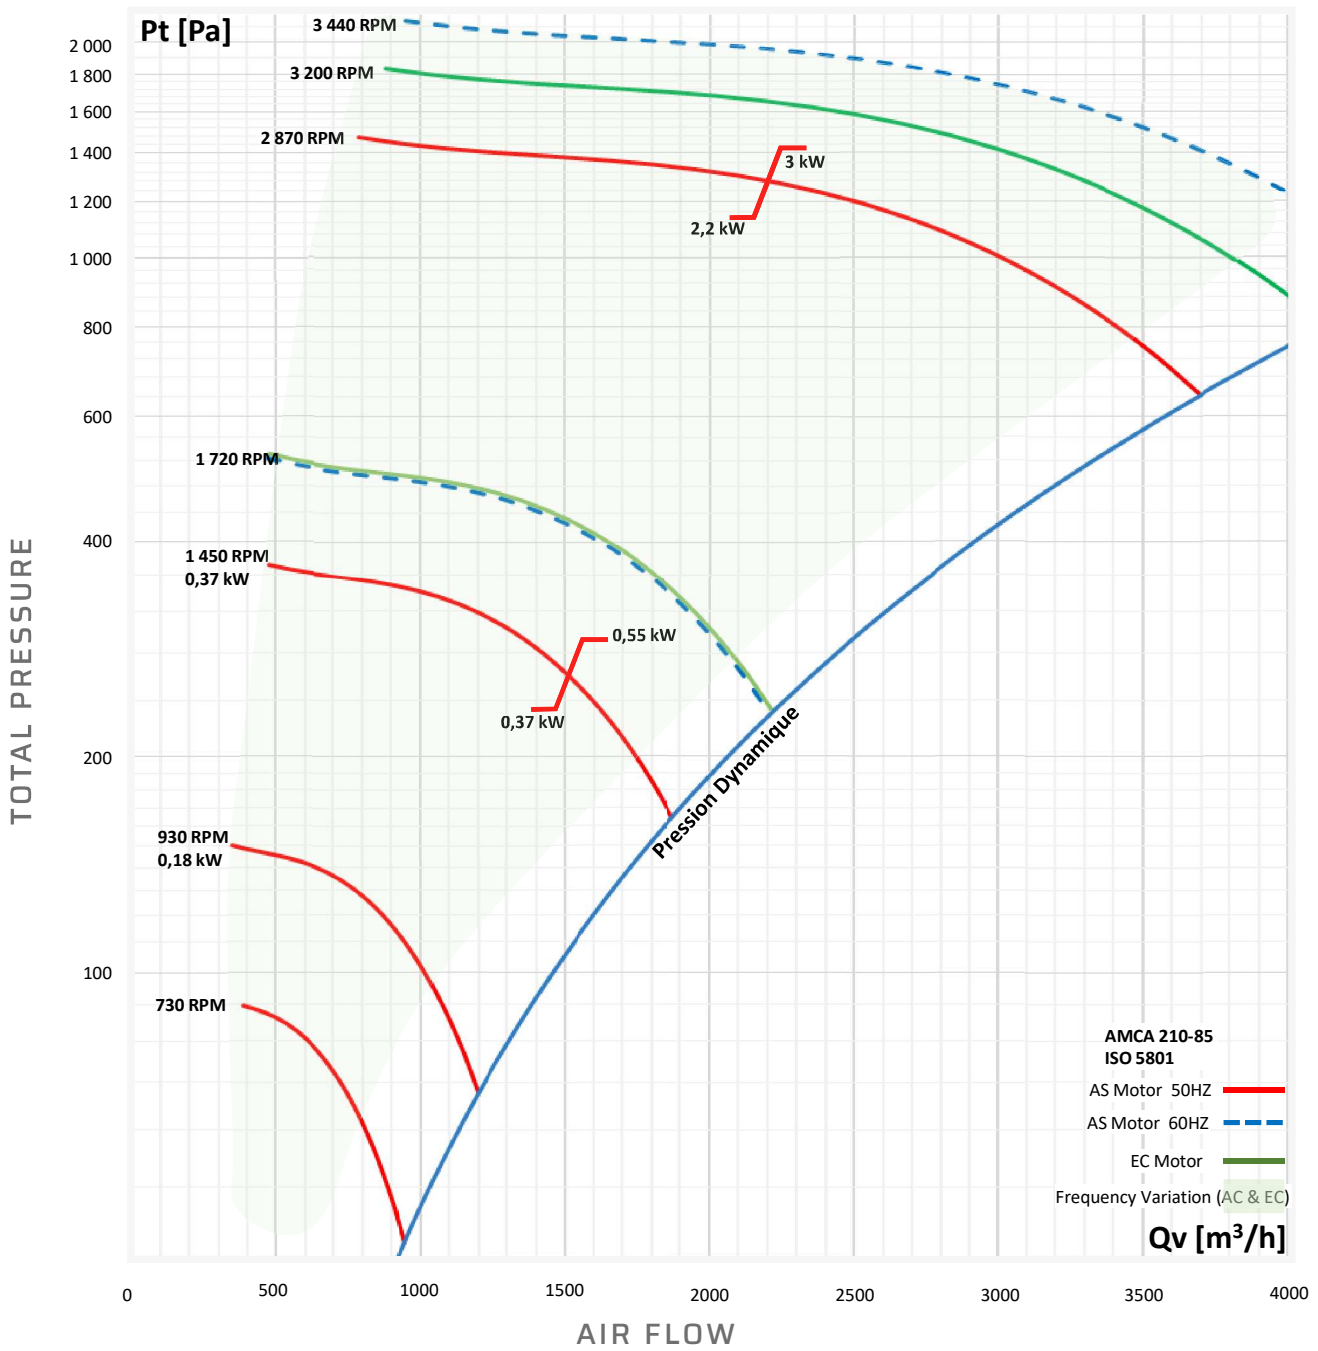

## ELECTRICAL FEATURES

Motor	Power (kW)	Motor RPM	Voltage (V)	Intensity (A)	Weight (kg)	Reference Number
IP55 Asynchronous Single-Phase	0,37	1450	230	2,7	14,2	71252010
IP65 EC Single-Phase	0,45	1720	220/277	4,3	9,8	72252010
IP55 Asynchronous Three-Phase	0,18	930	230/400	1,22/0,7	13,1	71251000
	0,37	1450	230/400	1,85/1,06	13,6	71252000
	0,55	1450	230/400	2,59/1,49	14,7	71252055
	2,2	2870	230/400	7,56/4,35	26,4	71253000
	3	2870	230/400	9,9/5,71	32,2	71253300
IP66 Asynchronous Three-Phase ATEX	0,18	930	230/400	1,5/0,85	29	71251003
	0,37	1450	230/400	1,94/1,12	14,6	71252003
	2,2	2870	230/400	8,7/5	23,2	71253003

Mandatory PTC Sensor for ATEX motor with Frequency Inverter.