


STORM SERIES

STORM 12

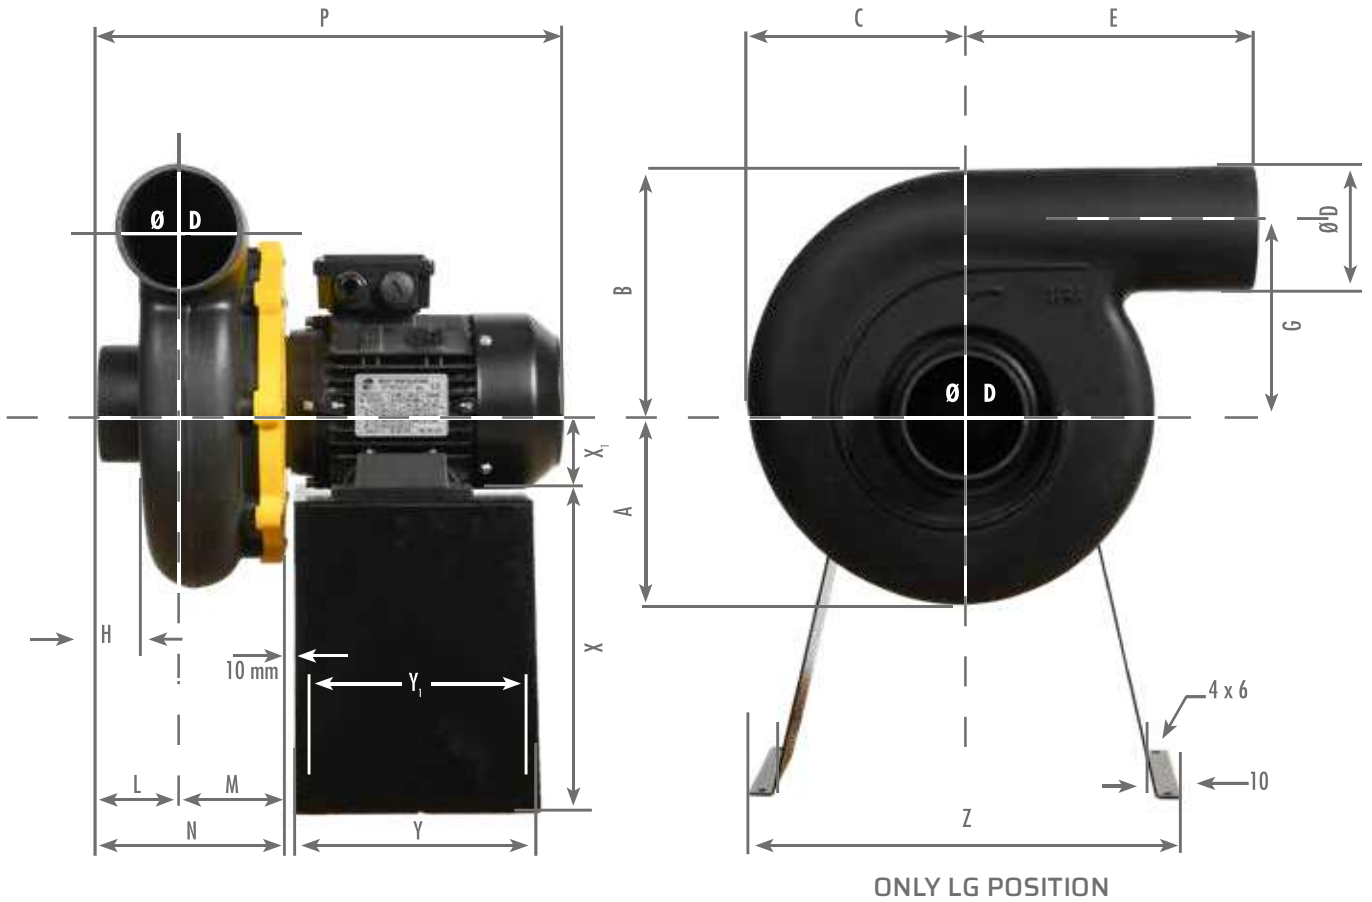

Available in 

Dimension (mm) - Metal stand not included (see accessories)															
Motor axis heights may vary according to the type of motor used															
A	B	C	ØD	E	G	H	L	M	N	P	Y	Y ₁	Z	X	X ₁
145	175	163	90	212	130	45	80	72	152	350	180	160	340	240	71

Left Rotation (Counter-Clockwise)




NOISE LEVELS


Speed (T/min)	Acoustic (dB)				Frequency Octave (Hz)							
	Qv (m ³ /h)	Sp (Pa)	LwA dB(A)	LpA* dB(A)	63	125	250	500	1000	2000	4000	8000
1450	175	167	71	51	86	80	69	69	68	57	50	43
2870	346	652	86	65	101	95	84	83	83	72	65	58

*Acoustic pressure Lp at 3 meters - Outlet acoustic data available on request.

STORM SERIES - **STORM 12**

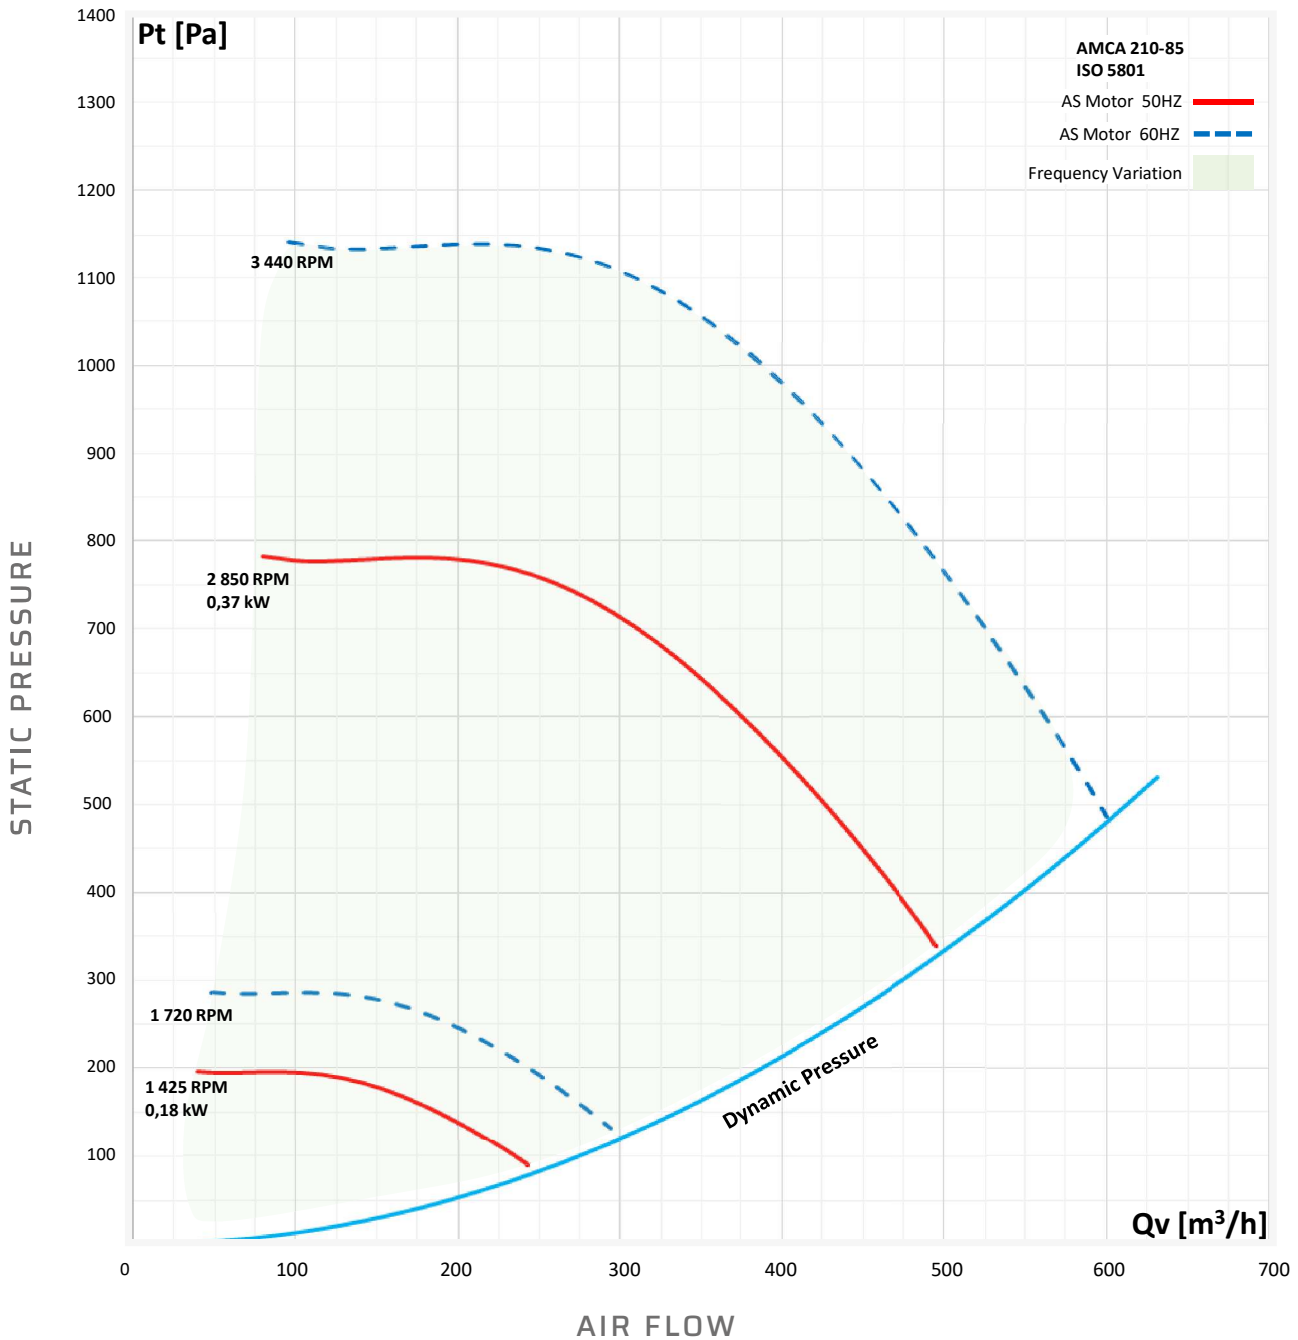

ELECTRICAL FEATURES

Motor	Power (kW)	Motor RPM	Voltage (V)	Intensity (A)	Weight (kg)	Reference Number
IP55 Asynchronous Single-Phase	0,18	1450	230	1,4	7,84	61122010
	0,37	2870	230	2,52	7,54	61123010
IP55 Asynchronous Three-Phase	0,18	1450	230/400	1,09/0,63	7,5	61122000
	0,37	2870	230/400	1,64/0,94	7,54	61123000
IP66 Asynchronous Three-Phase ATEX 	0,18	1450	230/400	1,13/0,65	12	61122003
	0,37	2870	230/400	2,1/1,2	9,75	61123003

Mandatory PTC Sensor for ATEX motor with Frequency Inverter.

SEAT
SERIES

STORM
SERIES

JET
SERIES

MOUNTING
OPTIONS

FREQUENCY
INVERTER

ACCESSORIES

AIR FLOW
CONTROLLERS