


SEAT SERIES

SEAT 30

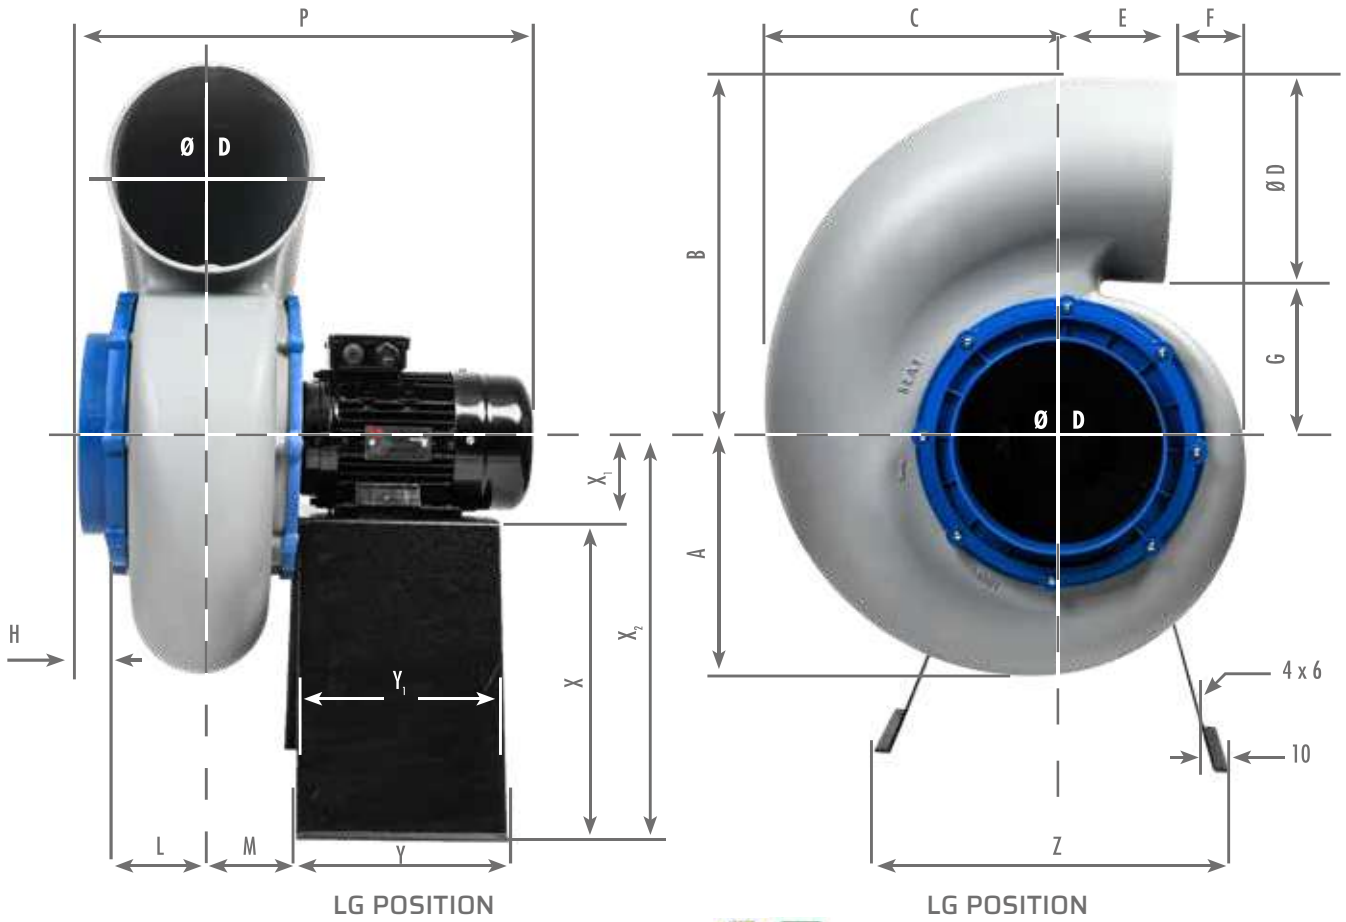

Available in  

Dimension (mm) - Metal stand not included (see accessories)																	
Motor axis heights may vary according to the type of motor used																	
RPM	A	B	C	ØD	E	F	G	H	L	M	P	Y	Y ₁	Z	X	X ₁	X ₂
930	300	450	373	250	117	112	198	35	110	120	510	240	220	460	370	80	450
1450	300	450	373	250	117	112	198	35	110	120	540	240	220	460	370	90	460

Left Rotation (Counter-Clockwise)



Right Rotation (Clockwise)




NOISE LEVELS

Speed (T/min)	Acoustic (dB)				Frequency Octave (Hz)							
	Qv (m ³ /h)	Sp (Pa)	LwA dB(A)	LpA* dB(A)	63	125	250	500	1000	2000	4000	8000
930	1590	206	72	51	86	82	72	68	66	62	57	52
1450	2476	500	82	61	96	91	81	78	76	72	67	61

*Acoustic pressure Lp at 3 meters - Outlet acoustic data available on request.

SEAT SERIES - SEAT 30

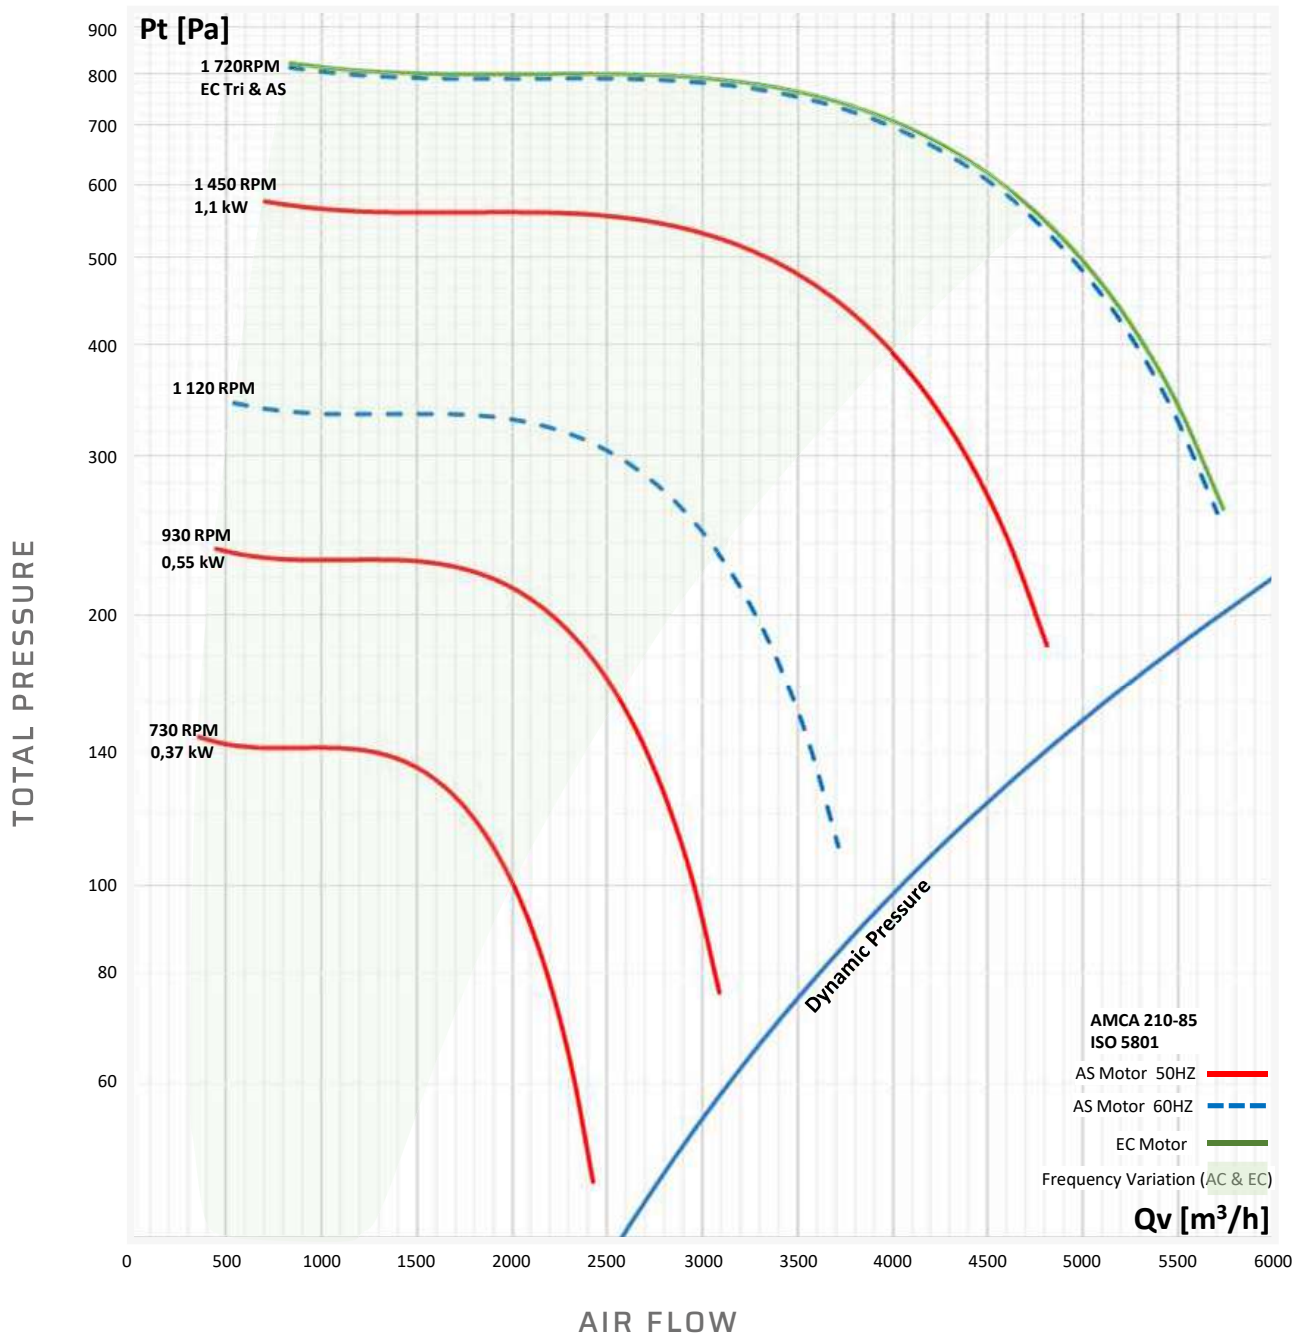

ELECTRICAL FEATURES

Motor	Power (kW)	Motor RPM	Voltage (V)	Intensity (A)	Weight (kg)	Reference Number
P55 Asynchronous Single-Phase	1,1	1450	230	7,23	20,7	51302010
IP65 EC Single-Phase	1	1720	220/277	8,8	21,1	52302010
IP55 Asynchronous Three-Phase	0,55	930	230/400	2,72/1,57	18,7	51301000
	1,1	1450	130/400	4,32/2,48	21,2	51302000
IP66 EC Three-Phase	1,3	1720	360/460	7,5	23,7	52302000
IP66 Asynchronous Three-Phase ATEX	0,55	950	230/400	3,5/2	18	51301003
	1,1	1450	230/400	5,7/3,3	20,7	51302003

Mandatory PTC Sensor for ATEX motor with Frequency Inverter.

SEAT SERIES

STORM SERIES

JET SERIES

MOUNTING OPTIONS

FREQUENCY INVERTER

ACCESSORIES

AIR FLOW CONTROLLERS