

VORTICE LINEO 200 QUIET (17164)


GENERAL DATA



Sound-proof mixed flow extractor fans

Fire resistant plastic resin construction, class E2, according to ISO EN 11925-2:2010, in the areas facing the motor and electrical components.
 Integral sound-absorbing casing, optimised to minimise the sound emissions radiated into the room and transmitted through the intake and discharge ducts.
 Thermally protected induction motor with shaft mounted on ball bearings, combined with a helical-centrifugal impeller. High degree of water resistance: IPX5 (when installed in a duct).
 Speed controllable by Vortice controllers.

PERFORMANCE CURVE

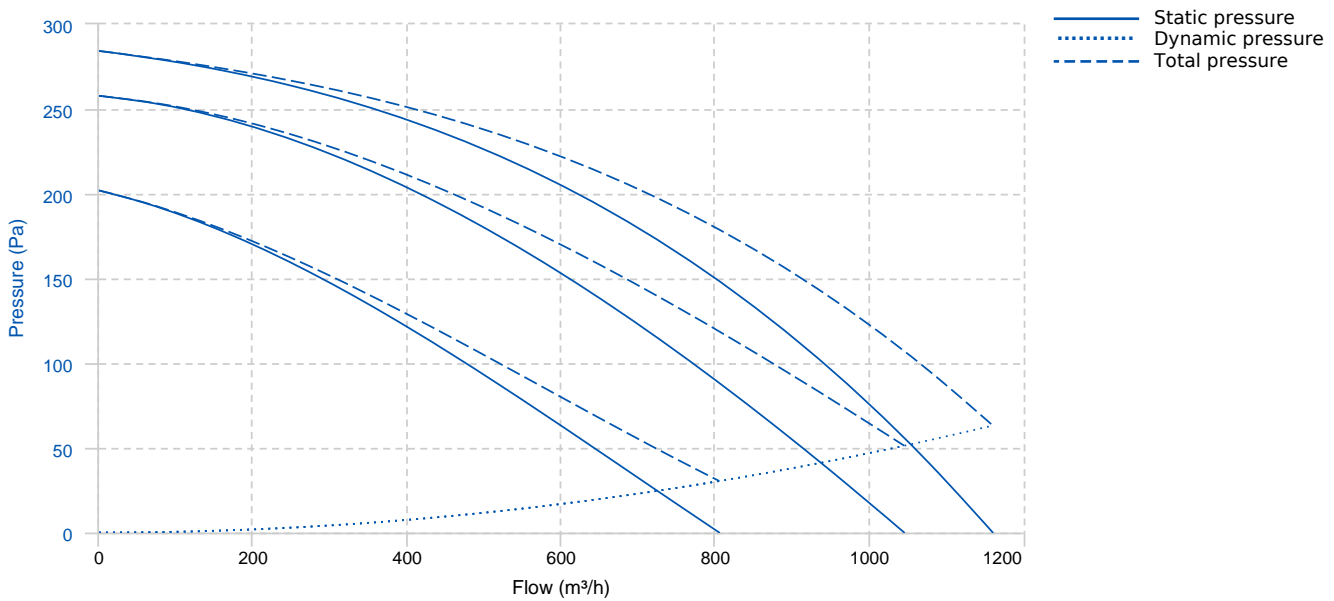


TECHNICAL DATA

Fan

Approx. weight	8.6 kg	Max. Flow	1160 m³/h
----------------	--------	-----------	-----------

DIMENSIONS

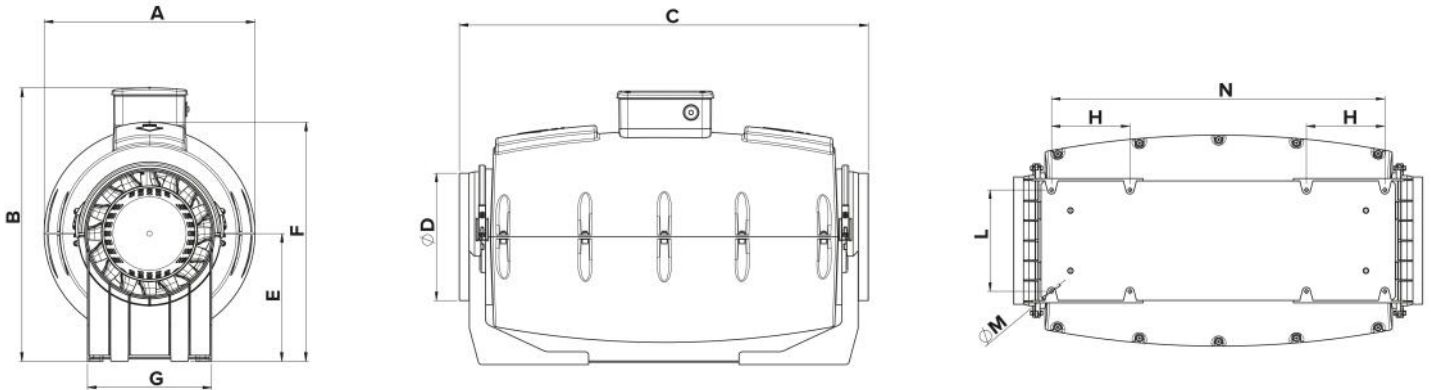


Dimensions (mm)

A	322.5	B	417.5	C	625.5	E	195	F	363.5
G	190	H	120	L	155	N	510	ØD	194.5
ØM	5.5								

WIRING DIAGRAM

FOR ELECTRICAL SCHEMES
PLEASE SEE THE USER MANUAL

ACCESSORIES





Controller
C 5 0,5 (5 speed controller)
REF: 12987



Controller
TRIO LINEO 503
REF: 12891