

VORTICE LINEO 250 QUIET (17165)


GENERAL DATA



Sound-proof mixed flow extractor fans

Fire resistant plastic resin construction, class E2, according to ISO EN 11925-2:2010, in the areas facing the motor and electrical components.
 Integral sound-absorbing casing, optimised to minimise the sound emissions radiated into the room and transmitted through the intake and discharge ducts.
 Thermally protected induction motor with shaft mounted on ball bearings, combined with a helical-centrifugal impeller. High degree of water resistance: IPX5 (when installed in a duct).
 Speed controllable by Vortice controllers.

PERFORMANCE CURVE



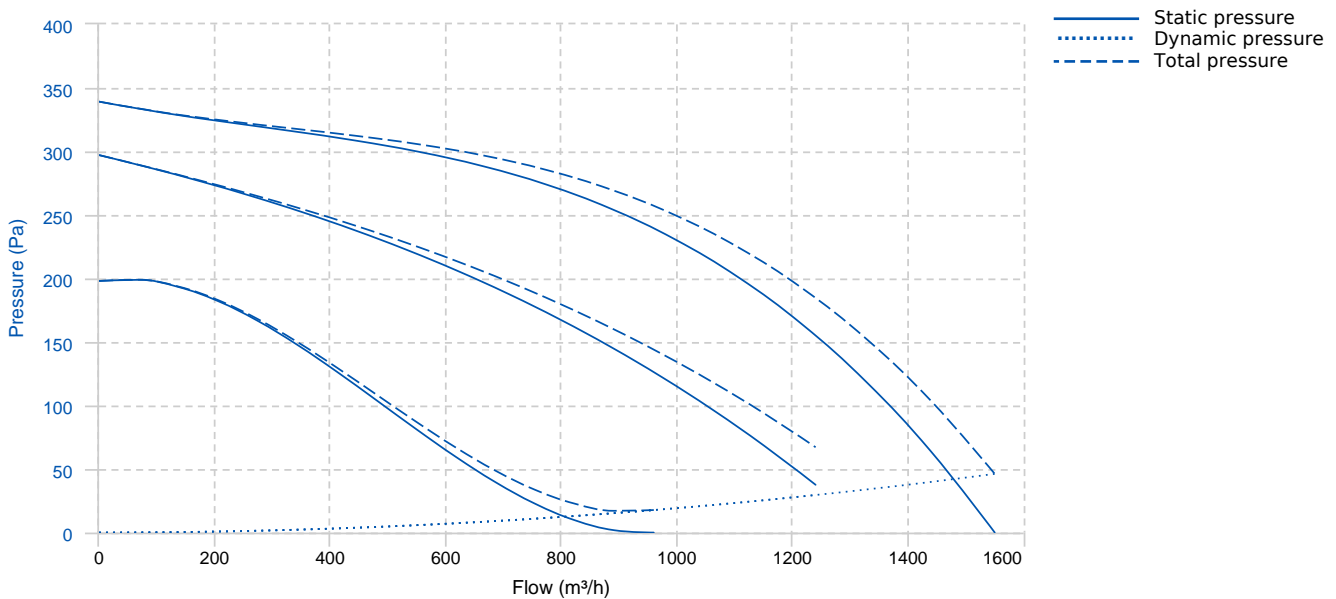


TECHNICAL DATA

Fan

Approx. weight	13.4 kg	Max. Flow	1550 m³/h
----------------	---------	-----------	-----------

DIMENSIONS

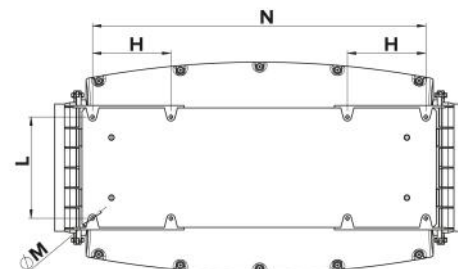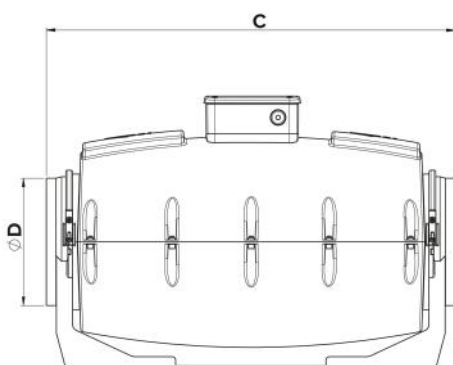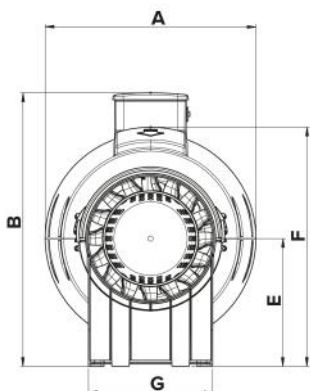

Dimensions (mm)

A	318	B	412	C	751.5	E	189.5	F	363.5
G	200	H	70	L	170	N	604.5	ØD	243
ØM	6.5								

WIRING DIAGRAM

FOR ELECTRICAL SCHEMES
PLEASE SEE THE USER MANUAL

ACCESSORIES



**SENSOR
C TEMP (temperature sensor)**
REF: 12992



**SENSOR
C SMOKE (smoke sensor)**
REF: 12993



**SENSOR
C HCS (humidity sensor)**
REF: 12994



**SENSOR
C PIR (passive infrared sensor)**
REF: 12998



**SENSOR
C TIMER**
REF: 12999



**Controller
C 2.5 (electronic speed controller)**
REF: 12967



Controller
TRIO LINEO 503
REF: 12891