

MG 120/5" (11116)

GENERAL DATA




- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 100 mm.
- Motor protected against thermal overload, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 80 m³/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controllers.

LL = with shaft turning in ball bearings (Long Life)

T = Timer

PERFORMANCE CURVE

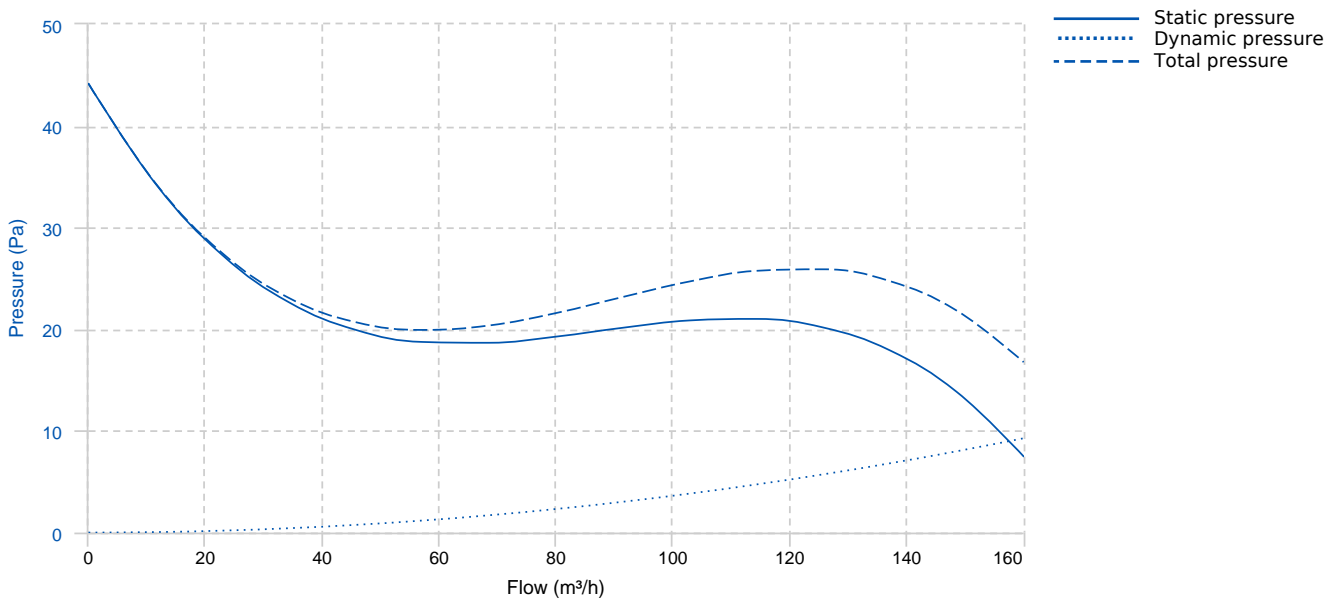

TECHNICAL DATA

Fan

RPM

-


Approx. weight

0.56 kg

Max. Flow

160 m³/h


DIMENSIONS

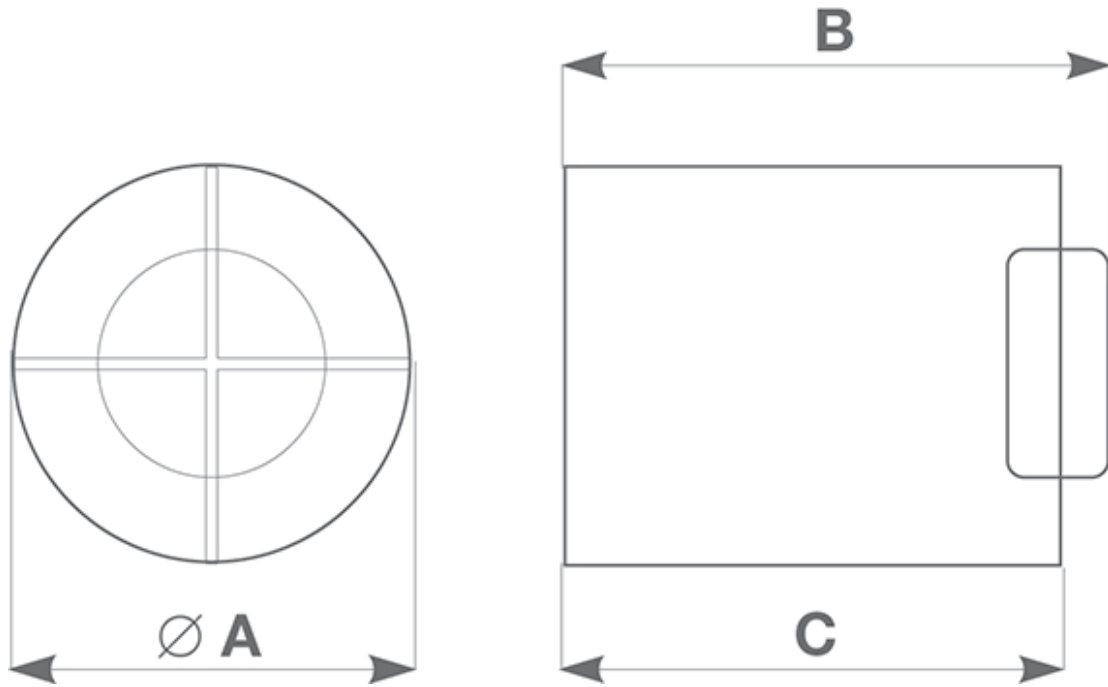

Dimensions (mm)

AØ	119	B	103	C	100
----	-----	---	-----	---	-----

WIRING DIAGRAM

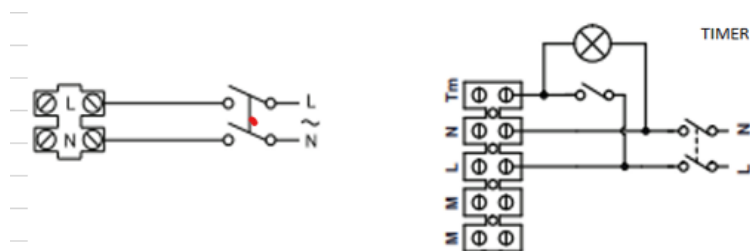

ACCESSORIES