

VORT-MEX 100/4" LL 1S T (11314)


GENERAL DATA



axial fans (wall installation)

- Plastic resin construction resistant to impact and aging due to sun exposure ("UV resistant").
- Nominal diameter 100 mm
- AC motor with shaft mounted on ball bearing support, directly combined with a helical-centrifugal plastic impeller.
- Maximum flow rate 90 m³/h
- Equipped with butterfly non-return valve as standard to avoid unwanted air re-entry when turned off.
- Degree of protection IP45, which guarantees the possibility of installation in Zone 1 of the bathroom according to the international standard IEC 60364-7.
- Safety certified IMQ.

PERFORMANCE CURVE

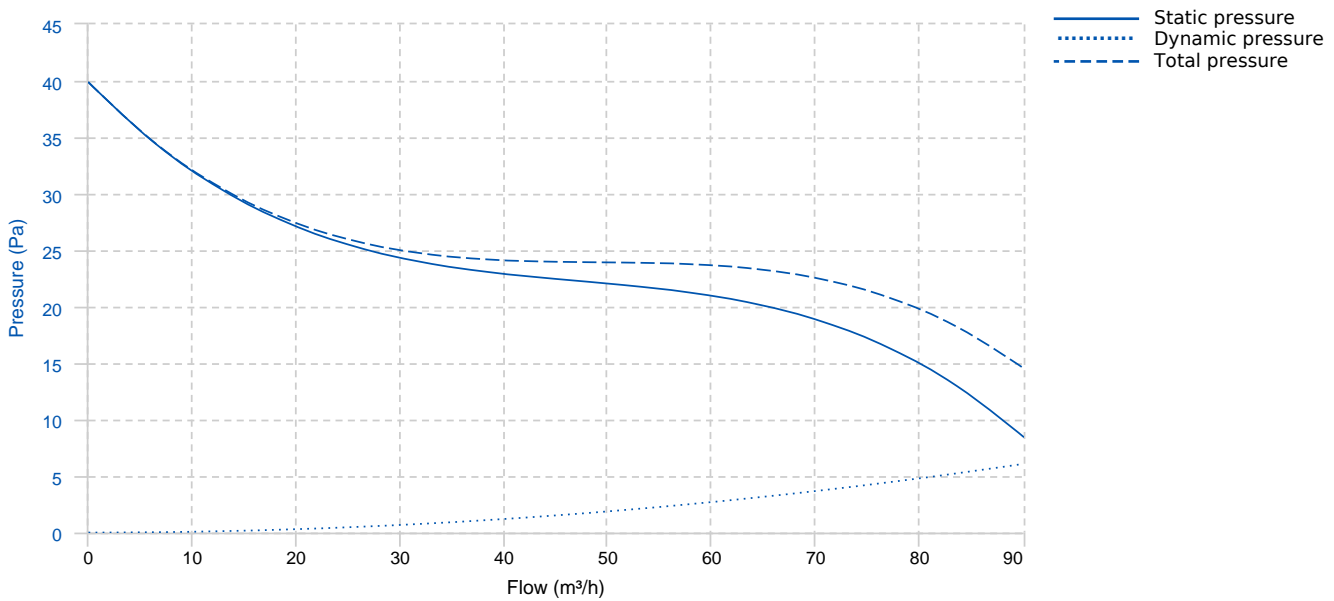


TECHNICAL DATA

Fan

Approx. weight	0.6 kg	Max. Flow	90 m ³ /h
----------------	--------	-----------	----------------------


DIMENSIONS

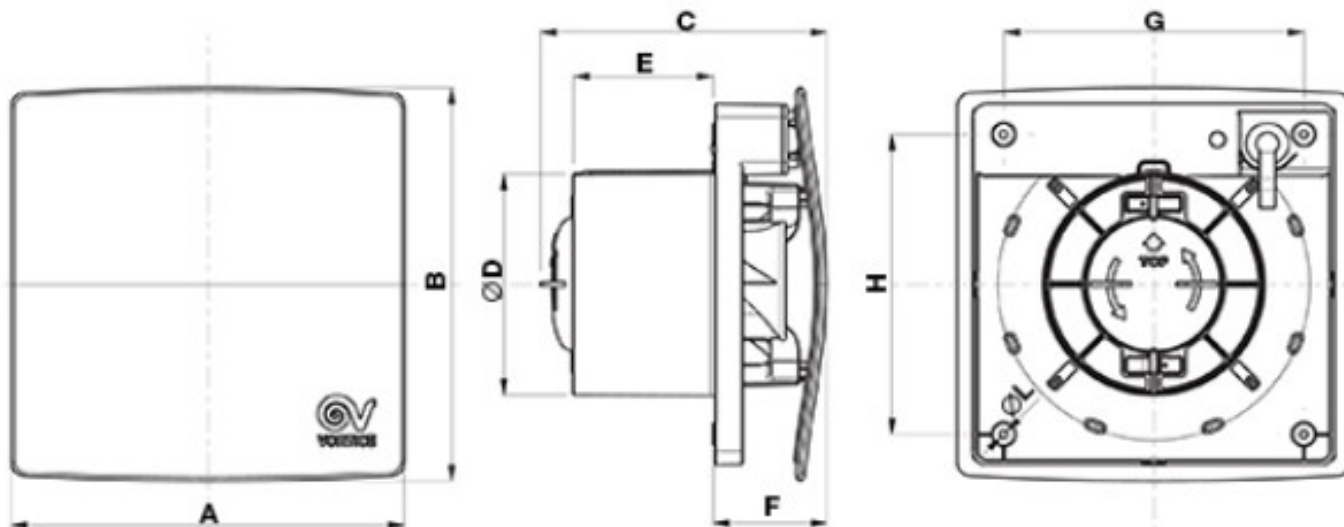

Dimensions (mm)

A	173	B	173	C	126	DØ	98	E	61.5
F	50	G	132	H	132	LØ	3.5		

WIRING DIAGRAM

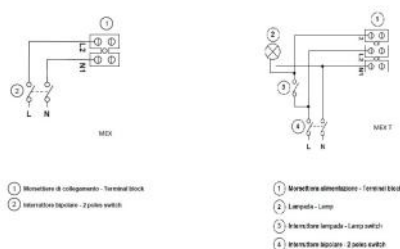

① Morsettiere di collegamento - Terminal block
② Interruttore bipolare - 2-poles switch

① Morsettiere alimentazione - Terminal block
② Lampada - Lamp
③ Interruttore lampada - Lamp switch
④ Interruttore bipolare - 2-poles switch

ACCESSORIES