

## VORTICE 230/9" ARI-LL-S (12456)

### GENERAL DATA



Axial reversible supply and extract fans

Pull cord (P) versions extract only

Versions:

P = Pullcord

LL = Long Life

AR = reversible

S = shutter

I = inbuilt installation


Sensors available

IPX4 rated

• **For intermittent or continuous ventilation of bathrooms, toilets, kitchens or utility rooms in domestic or commercial properties.**

- Motor with shielded poles, with bronze bearing and thermal cut-out.
- IMQ data label ensures data and performance is third party certified.
- High airflow rate, low operating noise level and low power consumption due to the wing profile blade and motor support.
- IPX4 splashproof protection.
- Motor support and grille made of anti-UV ABS.
- Conforms to the following standards: CEI EN 60335-2-80 (Part 2: Particular requirements for fans), CEI EN 60529(Code IP) and CEI 107-53/1986.

### PERFORMANCE CURVE

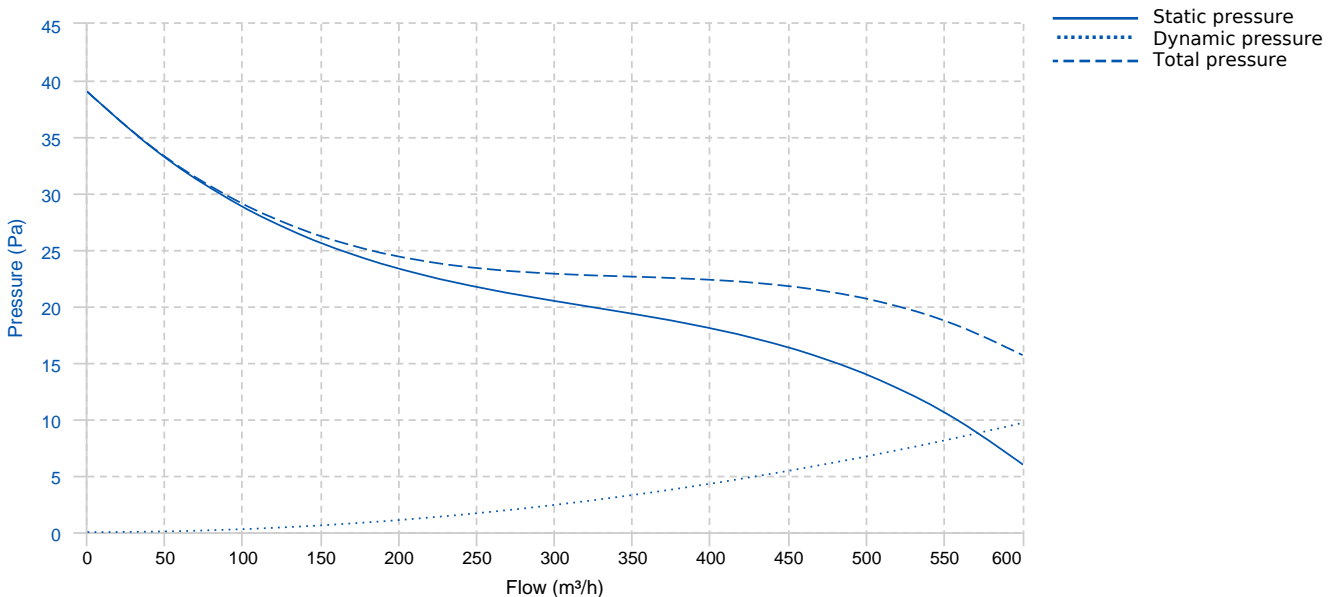


## TECHNICAL DATA

### Fan

RPM	-	Approx. weight	2.52 kg	Max. Flow	680 m <sup>3</sup> /h
-----	---	----------------	---------	-----------	-----------------------


## DIMENSIONS

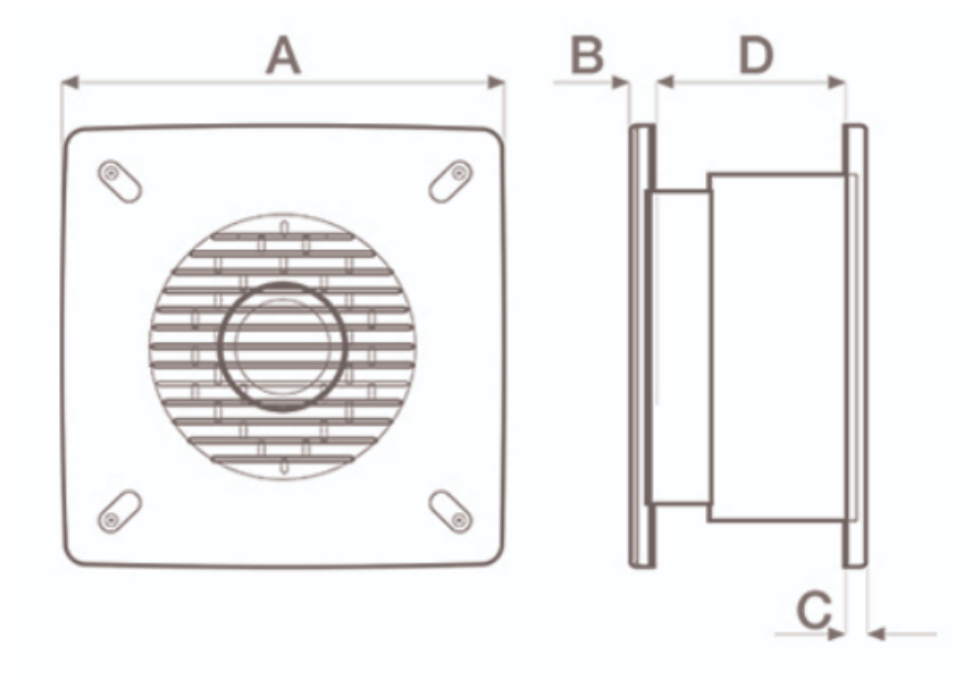


### Dimensions (mm)

A	400	B	10	C	11	D	180
---	-----	---	----	---	----	---	-----

## WIRING DIAGRAM



VARIO 150/6\"/>



A) Morsetteria

B) Interruttore bipolare

VARIO 150/6\"/>



VARIO 150/6\"/>

