


CA 100 MD (16150)

GENERAL DATA



- Pickled and phosphated steel housing with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- 3 speed fan through TRIO-CA optional control (cod. 12869), (not available for 16003) consisting of:
 - AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved centrifugal impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

PERFORMANCE CURVE

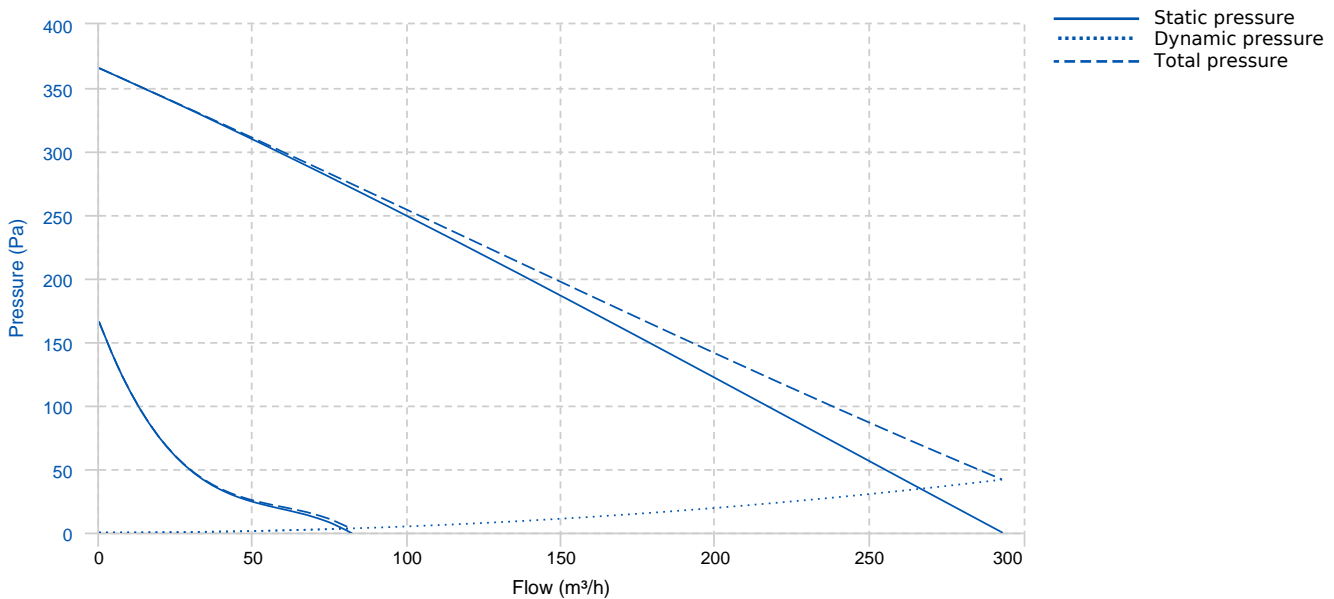


TECHNICAL DATA

Fan

Approx. weight	2.97 kg	Max. Flow	293 m³/h
----------------	---------	-----------	----------

DIMENSIONS

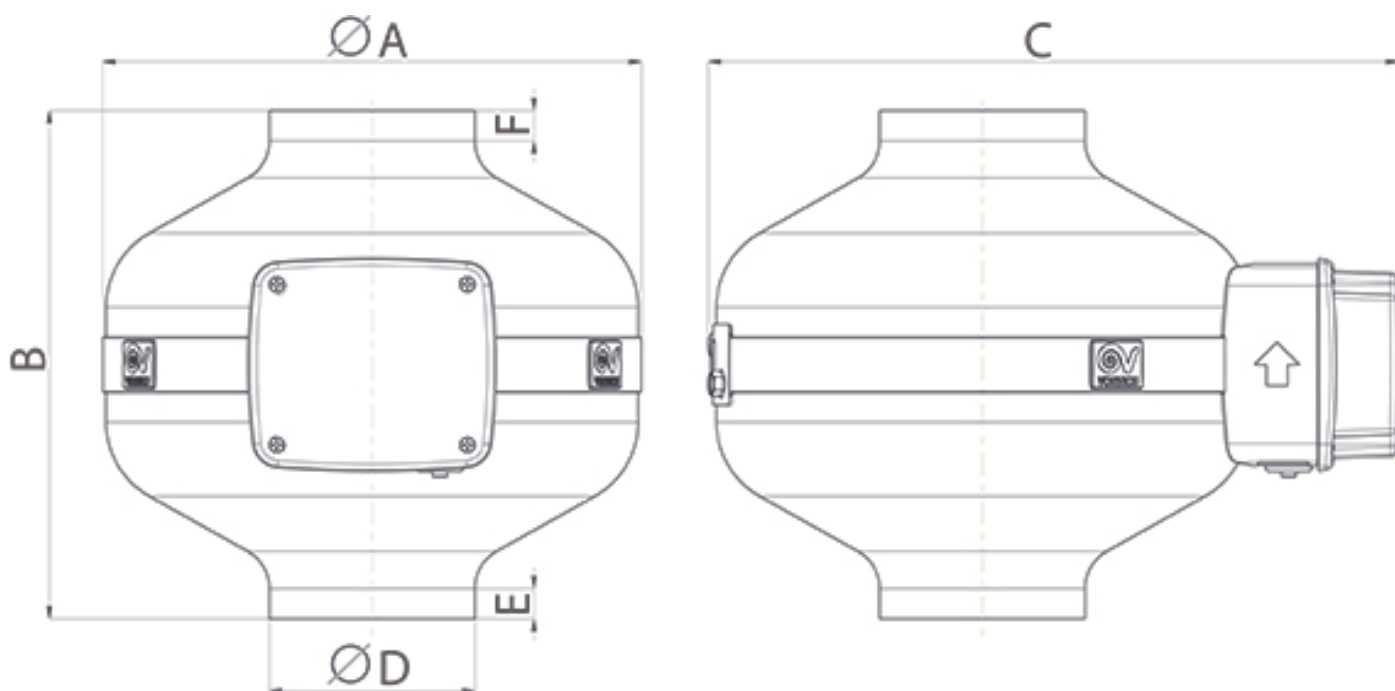

Dimensions (mm)

A	255	B	239	C	330	D	97	E	15
F	15								

ACCESSORIES



**SENSOR
C TEMP (temperature sensor)**
REF: 12992



**SENSOR
C SMOKE (smoke sensor)**
REF: 12993



**SENSOR
C HCS (humidity sensor)**
REF: 12994



**SENSOR
C PIR (passive infrared sensor)**
REF: 12998



**SENSOR
C TIMER**
REF: 12999



**Controller
TRIO LINEO 503**
REF: 12891



PROTECTION GRILLE
CA-G 100
REF: 22750



Brackes
CA-MU
REF: 22674



Controller
TRIO D
REF: 12866