


CA 125 MD (16151)

GENERAL DATA



- Pickled and phosphated steel housing with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- 3 speed fan through TRIO-CA optional control (cod. 12869), (not available for 16003) consisting of:
 - AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved centrifugal impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

PERFORMANCE CURVE

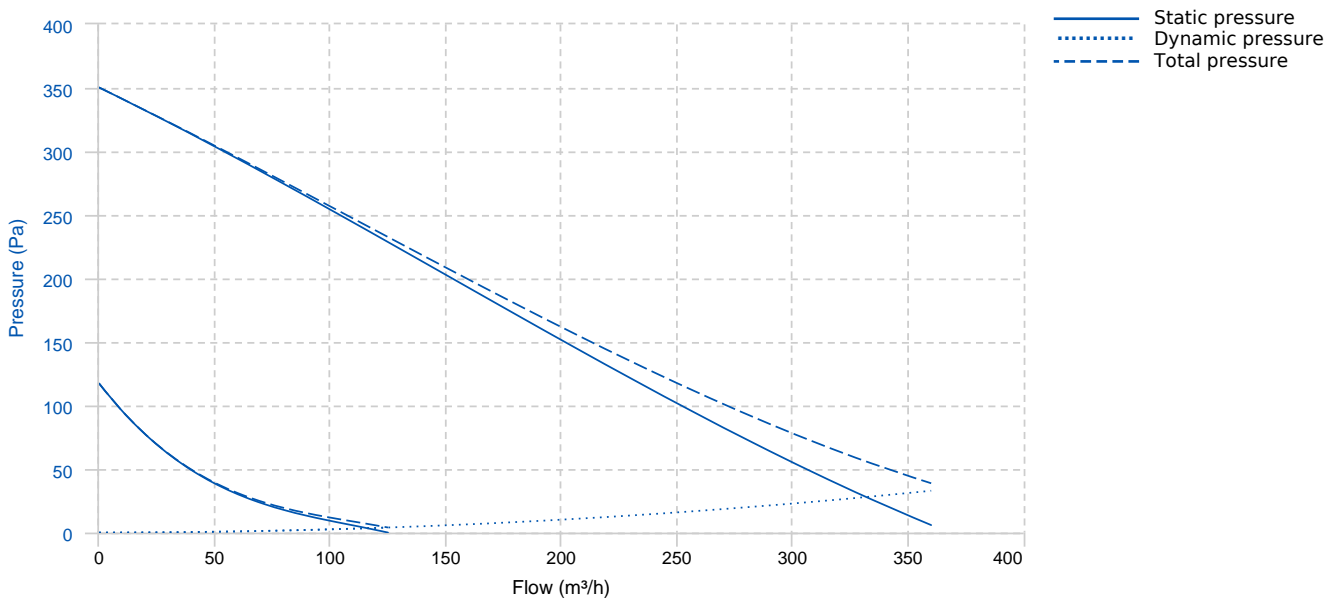


TECHNICAL DATA

Fan

Approx. weight	3 kg	Max. Flow	360 m³/h
----------------	------	-----------	----------

DIMENSIONS

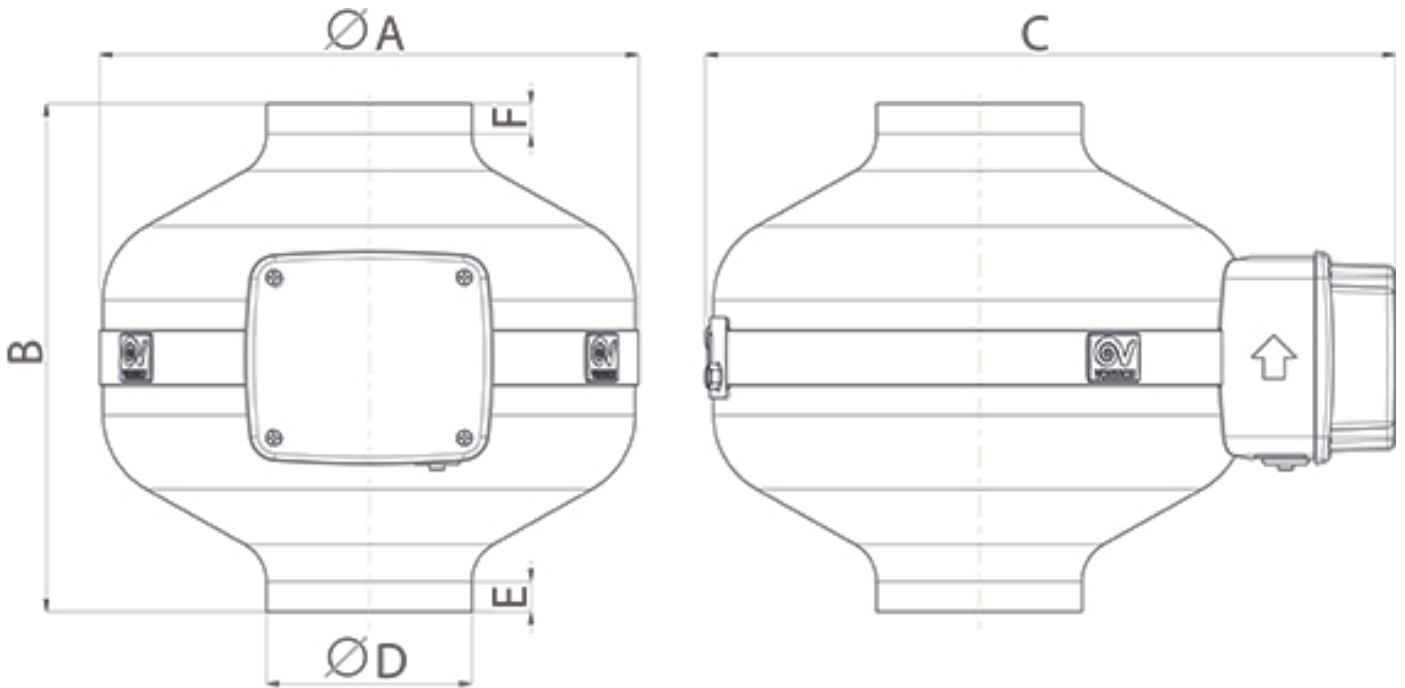

Dimensions (mm)

A	255	B	239	C	330	D	122	E	23
F	23								

ACCESSORIES

SENSOR
C TEMP (temperature sensor)
REF: 12992



SENSOR
C SMOKE (smoke sensor)
REF: 12993



SENSOR
C HCS (humidity sensor)
REF: 12994



SENSOR
C PIR (passive infrared sensor)
REF: 12998



SENSOR
C TIMER
REF: 12999



Controller
TRIO LINEO 503
REF: 12891





PROTECTION GRILLE
CA-G 125
REF: 22755



Brackes
CA-MU
REF: 22674



Controller
TRIO D
REF: 12866