


## CA 250 MD (extra EU) (16156)

### GENERAL DATA



- Pickled and phosphated steel housing with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- 3 speed fan through TRIO-CA optional control (cod. 12869), (not available for 16003) consisting of:
  - AC motor with thermal overload cutout and shaft turning in ball bearings,
  - backward curved centrifugal impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

### PERFORMANCE CURVE

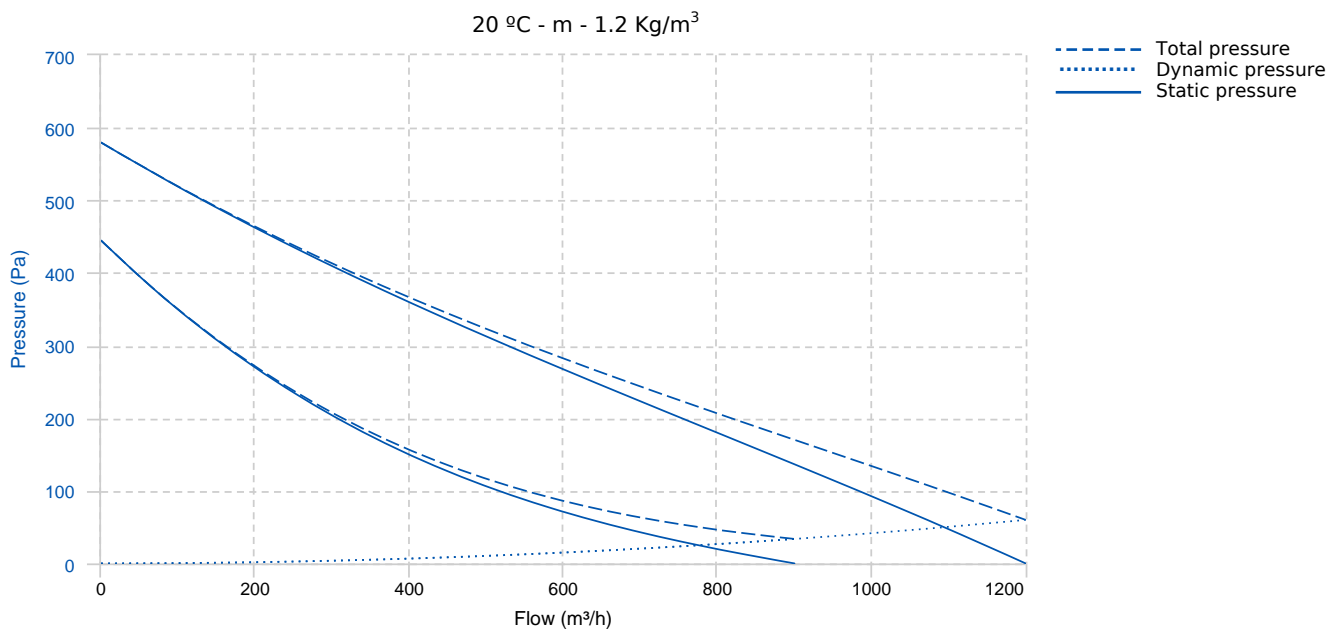


### TECHNICAL DATA

#### Fan

Approx. weight	7.6 kg	Max. Flow	1200 m³/h
----------------	--------	-----------	-----------


## DIMENSIONS

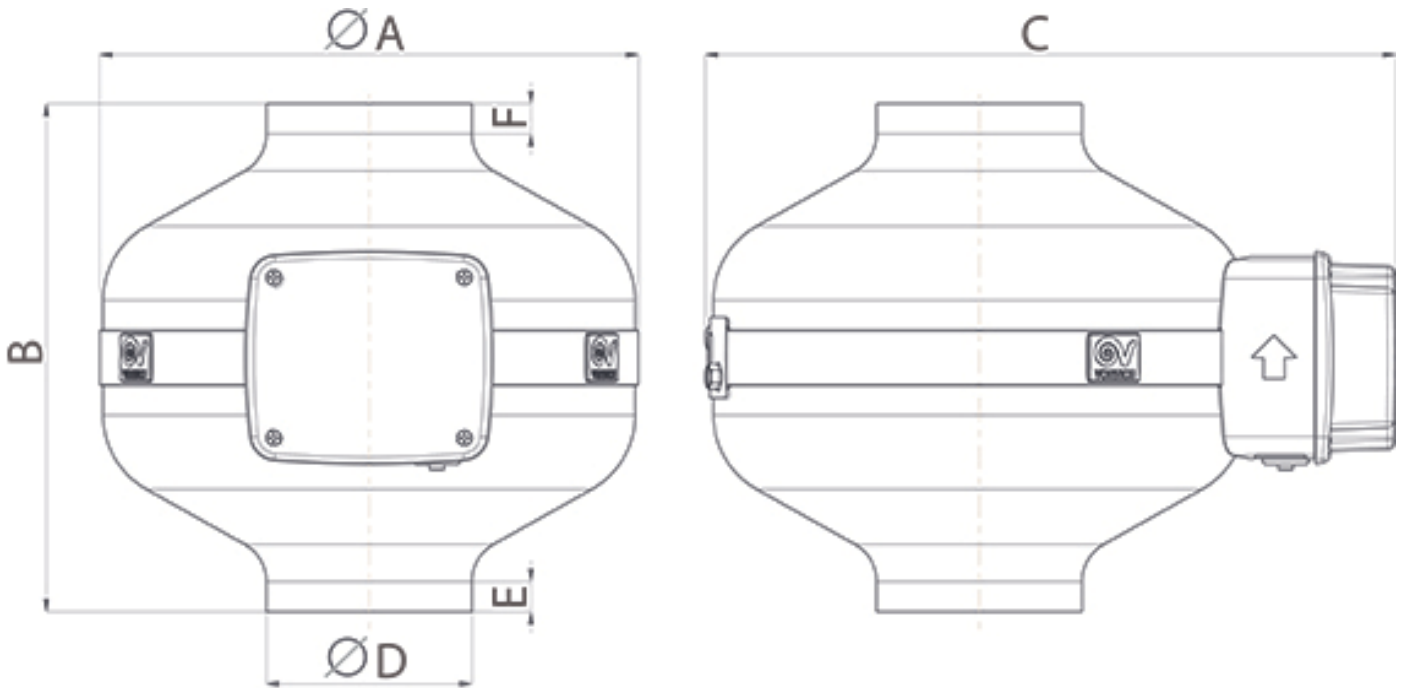

### Dimensions (mm)

A	347	B	275	C	424	D	247	E	38
F	35								

## WIRING DIAGRAM



**ACCESSORIES**

---